LITHIUM BATTERIES GUIDANCE

IN ACCORDANCE WITH THE

IATA DANGEROUS GOODS REGULATIONS 60TH EDITION 2019

Next



2019 Lithium Batteries Regulations

Defective / Damaged Batteries:

DHL will **NOT** accept any cells or batteries identified by the manufacturer as being defective for safety reasons, or that have been damaged, that have the potential of producing a dangerous evolution of heat, fire or short circuit (e.g. those being returned to the manufacturer for safety reasons).

DHL will **NOT** accept any waste batteries meant for recycling or disposal purposes (regardless of condition).

→ *A defective battery may not exhibit any damage at all!

Any equipment packed with or containing lithium batteries (in particular equipment returned for repair purposes as part of reverse logistics/service parts program) exhibiting above mentioned condition, must have the **batteries removed** from the equipment in order to be accepted for carriage with DHL.

Important Disclaimer:

Please note that the information contained in this Guide is purely illustrative and does not replace the study of the Dangerous Goods Regulations to perform any tasks related to the preparation of shipments containing Lithium Batteries.

DHL will not be held responsible for any inaccuracy, error or omission, regardless of cause.

Previous

Next



2019 Lithium Batteries Regulations: Battery Types

Step 1 – What type of battery are you shipping?

Lithium Ion Batteries or cells



Rechargeable (secondary) lithium ion or lithium polymer cells or batteries.

Very commonly found in portable consumer electronics such as laptops, mobile phones, MP3 players, camcorders, cordless power tools, etc. .

Lithium Metal Batteries or cells



Non-rechargeable (primary) lithium metal or lithium alloy cells or batteries

Longer life than standard alkaline batteries / cells, and commonly used in cameras, smoke detectors, etc.

Previous







Step 2 – How are you shipping them?

Batteries / cells only

Batteries / cells
packed with
equipment
(separately in the
same package)

Batteries / cells contained in equipment















Step 2 – How are you shipping them?

Batteries / cells only

Batteries / cells
packed with
equipment
(separately in the
same package)

Batteries / cells contained in equipment










2019 Lithium Batteries Regulations: Watt Hours



Step 3 – What is the capacity (Watt Hour* rating) of your battery?

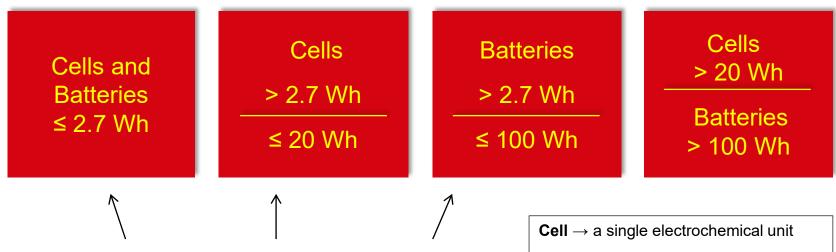

If shipped without equipment, cells and /or batteries of these three types must not be combined in the same package!

Battery → a number of cells electrically connected to each other and packed together in a common housing


*The Watt Hours must be indicated on the outside of the battery, for batteries manufactured as of January 2009. Laptops, mobile phones and other small consumer electronics usually have batteries with less than 100 Watt Hours (except for perhaps some extra duration batteries). Use the formula **Ampere Hours x Voltage** in case the Watt Hour rating is not marked on the battery.







Step 3 – How much lithium does your battery / cell contain?

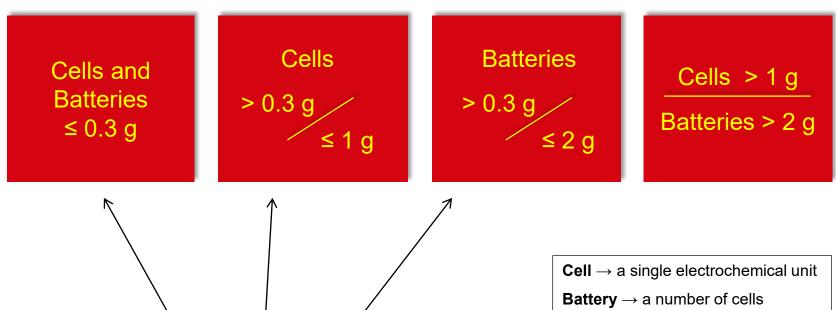

If shipped without equipment, cells and /or batteries of these three types must not be combined in the same package!

Battery → a number of cells electrically connected to each other and packed together in a common housing







Step 4 – How many cells does your package contain in total?






Please note:







Step 4 – How many batteries does your package contain in total?

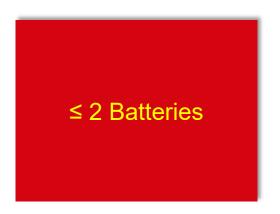



Please note:







Step 4 – How many cells does your package contain in total?






Please note:







Step 4 – How many batteries does your package contain in total?

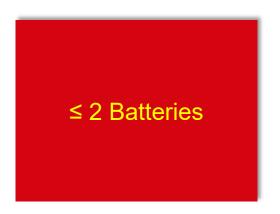



Please note:







Step 3 – What is the capacity (Watt Hour* rating) of your battery?

Cells ≤ 20 Wh or Batteries ≤ 100 Wh

*The Watt Hours must be indicated on the outside of the battery, for batteries manufactured as of January 2009. Laptops, mobile phones and other small consumer electronics have batteries with less than 100 Watt Hours (except perhaps some extra duration batteries). Use the formula **Ampere Hours x Voltage** in case the Watt Hour rating is not marked on the battery).

Cells
> 20 Wh
or Batteries
> 100 Wh

→ Cell

a single encased electrochemical unit

→ Battery

a number of cells electrically connected to each other and packed together in a common housing







Step 3 – What is the capacity (Watt Hour* rating) of your battery?

Cells ≤ 20 Wh or Batteries ≤ 100 Wh

*The Watt Hours must be indicated on the outside of the battery, for batteries manufactured as of January 2009. Laptops, mobile phones and other small consumer electronics have batteries with less than 100 Watt Hours (except perhaps some extra duration batteries). Use the formula **Ampere Hours x Voltage** in case the Watt Hour rating is not marked on the battery).

Cells
> 20 Wh
or Batteries
> 100 Wh

→ Cell

a single encased electrochemical unit

→ Battery

a number of cells electrically connected to each other and packed together in a common housing







Step 3 – How much lithium does your battery / cell contain?

Cells ≤ 1 g or Batteries ≤ 2 g Cells
> 1 g
or Batteries
> 2 g





Step 3 – How much lithium does your battery / cell contain?

Cells ≤ 1 g or Batteries ≤ 2 g Cells
> 1 g
or Batteries
> 2 g





Step 4 – How many cells or batteries does your package contain in total?

≤ 4 Cells or ≤ 2 Batteries > 4 Cells or > 2 Batteries

Please note:





2019 Lithium Batteries Regulations: Lithium Ion Batteries

Step 4 – How many packages are in the consignement?











Step 4 – How many cells or batteries does your package contain in total?

≤ 4 Cells or ≤ 2 Batteries > 4 Cells or > 2 Batteries

Please note:



2019 Lithium Batteries Regulations: Lithium Metal Batteries

Step 4 – How many packages are in the consignement?







UN3480, Lithium Ion Batteries / Cells – PI965 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging.

Cells and batteries must not be packed in the same outher packaging with other dangerous goods. State of Charge (SoC) of the battery or cell must not exceed 30%.

If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD.

The overpack may also contain packages of dangerous goods, other than those classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR. Maximum **2.5 kg** net quantity of lithium batteries or cells per package. **Cargo Aircraft Only (CAO) Package test:** 1.2 m drop test.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

- □ "Lithium ion batteries in compliance with Section II of PI965"
- ☐ "Cargo Aircraft Only" or "CAO"

- **TDI** Separate account approval required. The service is limited due to CAO restrictions.
- ACS Select "LB" and mention "CAO" in the restricted commodity type



UN3480, Lithium Ion Batteries / Cells – PI965 Section IA



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging.

State of Charge (SoC) of the battery or cell must not exceed 30%.

Cells and batteries must not be packed in the same outer packaging, or placed in an overpack with, dangerous goods classified in Class 1 (except 1.4S), Division 2.1 (flammable gases), Class 3 (flammable liquids), Division 4.1 (flammable solids) and Division 5.1 (oxidizers).

Maximum 35 kg net quantity of lithium batteries or cells per package. Cargo Aircraft Only (CAO)

Package test: Packing Group II performance standards. UN specification packaging is required.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO"



- TDI Account must be approved. Lithium ion batteries/cells packed according to this section are not accepted in TDI Express when transported via road to/from an ADR member state.
- ACS Select "DG" and mention "CAO" in the restricted commodity type.



UN3480, Lithium Ion Batteries / Cells – PI965 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging.

Cells and batteries must not be packed in the same outher packaging with other dangerous goods. State of Charge (SoC) of the battery or cell must not exceed 30%.

If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD.

The overpack may also contain packages of dangerous goods, other than those classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR. Maximum 8 cells per package. Cargo Aircraft Only (CAO)

Package test: 1.2 m drop test.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

- □ "Lithium ion batteries in compliance with Section II of PI965"
- ☐ "Cargo Aircraft Only" or "CAO"

- **TDI** Separate account approval required. The service is limited due to CAO restrictions.
- ACS Select "LB" and mention "CAO" in the restricted commodity type.



UN3480, Lithium Ion Batteries / Cells – PI965 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging.

Cells and batteries must not be packed in the same outher packaging with other dangerous goods. State of Charge (SoC) of the battery or cell must not exceed 30%.

If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD.

The overpack may also contain packages of dangerous goods, other than those classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR. Maximum 2 batteries per package. Cargo Aircraft Only (CAO)

Package test: 1.2 m drop test.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

- □ "Lithium ion batteries in compliance with Section II of PI965"
- ☐ "Cargo Aircraft Only" or "CAO"

- **TDI** Separate account approval required. The service is limited due to CAO restrictions.
- **ACS** Select "LB" and mention "CAO" in the restricted commodity type.



UN3480, Lithium Ion Batteries / Cells – PI965 Section IB



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging. Cells and batteries must not be packed in the same outer packaging, or placed in an overpack with, dangerous goods classified in Class 1 (except 1.4S), Division 2.1 (flammable gases), Class 3 (flammable liquids), Division 4.1 (flammable solids) and Division 5.1 (oxidizers).

State of Charge (SoC) of the battery or cell must not exceed 30%.

Maximum 10 kg net quantity of lithium batteries or cells per package. Cargo Aircraft Only (CAO)

Package test: 1.2 m drop test.

Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO"

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Account must be approved. The service is limited due to CAO restrictions

ACS - Select "DG" and mention "CAO" in the restricted commodity type





UN3481, Lithium Ion Batteries / Cells – PI966 Section II



Packaging:

Cells and/or batteries must be completely enclosed in inner packaging then placed in a strong rigid outer packaging; or must be completely enclosed in inner packaging then placed with equipment in a strong rigid outer packaging.

The equipment must be secured against any movement within the outer packaging and must be equipped with an effective means of preventing accidental activation.

Maximum number of batteries or cells per package = **those necessary to power the equipment plus 2 spares sets.** (A "set" of cells or batteries is the number of individual cells or batteries that are required to power each piece of equipment)

Maximum net quantity of lithium batteries or cells per package is **5 kg** for either "**Passenger and Cargo Aircraft**" or "**Cargo Aircraft Only** "shipments.

Package test: 1.2 m drop test.

Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium ion batteries in compliance with Section II of PI966"

DHL Services: (TDI = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Account must be approved.

ACS - Select "LB" and mention "Section II" in the restricted commodity type.

<u>Labeling /</u> <u>Marking:</u>





UN3481, Lithium Ion Batteries / Cells – PI966 Section I



Packaging:

Cells and/or batteries must be completely enclosed in inner packaging then placed in a strong rigid outer packaging; or must be completely enclosed in inner packaging then placed with equipment in a strong rigid outer packaging. The equipment must be secured against any movement within the outer packaging and must be equipped with an effective means of preventing accidental activation.

Maximum number of batteries /cells per package = those necessary to power the equipment plus

2 spares sets. (A "set" of cells or batteries is the number of individual cells or batteries that are required to power each piece of equipment).

Maximum net quantity of lithium batteries or cells per package is **5 kg** for "**Passenger and Cargo Aircraft**" (PAX) and **35 kg** for "**Cargo Aircraft Only**" (CAO) shipments.

<u>As a DHL requirement</u> cells and batteries must not be packed in the same outer packaging, or placed in an overpack, with dangerous goods classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1.

Package test: Packing Group II performance standards. UN specification packaging is required.

<u>Labeling /</u> <u>Marking:</u>



When CAO used:



Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO" (only when CAO was chosen)

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)



ACS - Select"DG" and mention "PAX" or "CAO" as applicable, in the restricted commodity type.





UN3481, Lithium Ion Batteries / Cells – PI967 Section II



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

Maximum **5 kg** net qty of lithium batteries or cells per package (excluding the equipment).

Maximum 2 packages per shipment (consignment).

<u>Labeling /</u> <u>Marking:</u>

No requirements.

Package test: No requirements.

Documentation:

No requirements

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – No requirements.

ACS – No requirements.



UN3481, Lithium Ion Batteries / Cells – PI967 Section II



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

Maximum net quantity of lithium batteries or cells per package is **5 kg** (excluding the equipment) for either "**Passenger and Cargo Aircraft**" or "**Cargo Aircraft Only** "shipments.

<u>Labeling /</u> Marking:



Package test: Strong rigid outer packaging equivalent to its capacity and intended use.

Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium ion batteries in compliance with Section II of PI967"

DHL Services: (TDI = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Account must be approved.

ACS - Select "LB" and mention "Section II" in the restricted commodity type.



UN3481, Lithium Ion Batteries / Cells – PI967 Section I



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

Maximum net quantity of lithium batteries or cells per package (excluding the equipment) is **5 kg** for "Passenger and Cargo Aircraft" (PAX) and **35 kg** for "Cargo Aircraft Only" (CAO) shipments.

<u>As a DHL requirement</u> cells and batteries must not be packed in the same outer packaging, or placed in an overpack, with dangerous goods classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1.

Package test: Strong rigid outer packaging equivalent to its capacity and intended use.

<u>Labeling /</u> <u>Marking:</u>



When CAO used:



Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO" (only when CAO was chosen)



- TDI Account must be approved. Lithium ion batteries / cells packed according to this section are not accepted in TDI Express when transported via road to/from an ADR member state.
- ACS Select"DG" and mention "PAX" or "CAO" as applicable, in the restricted commodity type.

UN3090, Lithium Metal Batteries / Cells – PI968 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging. Cells and batteries must not be packed in the same outher packaging with other dangerous goods. If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD. The overpack may also contain packages of dangerous goods, other than those classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR. Maximum 2.5 kg net quantity of lithium batteries or cells per package. Cargo Aircraft Only (CAO) Package test: 1.2 m drop test.

<u>Labeling /</u> Marking:





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium metal batteries in compliance with Section II of PI968"

☐ "Cargo Aircraft Only" or "CAO"

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI - Forbidden.

ACS - Select "LB" and mention "CAO" in the restricted commodity type Shipping ACS consignments to, from or within the Asia Pacific region is possible for RCG approved shipments on approved routings only.



UN3090, Lithium Metal Batteries / Cells – PI968 Section IA



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging. Cells and batteries must not be packed in the same outer packaging, or placed in an overpack with, dangerous goods classified in Class 1 (except 1.4S), Division 2.1 (flammable gases), Class 3 (flammable liquids), Division 4.1 (flammable solids) and Division 5.1 (oxidizers).

Maximum 35 kg net quantity of lithium batteries or cells per package. Cargo Aircraft Only (CAO)

Package test: Packing Group II performance standards. UN specification packaging is required.



Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO"



- TDI Account must be approved. Lithium metal batteries/cells packed according to this section are not accepted in TDI Express when transported via road to/from an ADR member state.
- ACS Select "DG" and mention "CAO" in the restricted commodity type. Shipping ACS consignments to, from or within the Asia Pacific region is possible for RCG approved shipments on approved routings only.



UN3090, Lithium Metal Batteries / Cells - PI968 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging. Cells and batteries must not be packed in the same outher packaging with other dangerous goods. If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD. The overpack may also contain packages of dangerous goods, other than those classified in Class 1

(except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR.

Package test: 1.2 m drop test.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium metal batteries in compliance with Section II of PI968"

Maximum 8 cells per package. Cargo Aircraft Only (CAO)

☐ "Cargo Aircraft Only" or "CAO"

- TDI Forbidden.
- ACS Select "LB" and mention "CAO" in the restricted commodity type Shipping ACS consignments to, from or within the Asia Pacific region is possible for RCG approved shipments on approved routings only.



UN3090, Lithium Metal Batteries / Cells - PI968 Section II



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging. Cells and batteries must not be packed in the same outher packaging with other dangerous goods. If part of a consolidation, packages and/or overpacks containing batteries assigned to this section must be offered to DHL separately from the goods in the consolidation that are not subject to the ICAO / IATA DGR. Furthermore only one package is accepted per each single consignment and / or overpack. These batteries will not be accepted if tendered in a customer pre-built ULD. The overpack may also contain packages of dangerous goods, other than those classified in Class 1

(except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1, or goods not subject to IATA DGR.

<u>Labeling /</u> <u>Marking:</u>





Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium metal batteries in compliance with Section II of PI968"

Maximum 2 batteries per package. Cargo Aircraft Only (CAO)

☐ "Cargo Aircraft Only" or "CAO"

Package test: 1.2 m drop test.

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Forbidden.

ACS - Select "LB" and mention "CAO" in the restricted commodity type Shipping ACS consignments to, from or within the Asia Pacific region is possible for RCG approved shipments on approved routings only.



UN3090, Lithium Metal Batteries / Cells – PI968 Section IB



Packaging:

Each battery /cell must be protected against a short circuit and placed in an inner packaging that completely encloses the battery /cell, then placed in a strong rigid outer packaging.

Cells and batteries must not be packed in the same outer packaging, or placed in an overpack with, dangerous goods classified in Class 1 (except 1.4S), Division 2.1 (flammable gases), Class 3 (flammable liquids), Division 4.1 (flammable solids) and Division 5.1 (oxidizers).

Maximum 2.5 kg net quantity of lithium batteries or cells per package. Cargo Aircraft Only (CAO)

Package test: 1.2 m drop test.





Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO"

- TDI Account must be approved. Forbidden in TDI Express to, from or within the Asia Pacific region due to air carriers restrictions.
- ACS Select "DG" and mention "CAO" in the restricted commodity type. Shipping ACS consignments to, from or within the Asia Pacific region is possible for RCG approved shipments on approved routings only.



UN3091, Lithium Metal Batteries / Cells - PI969 Section II



Packaging:

Cells and/or batteries must be completely enclosed in inner packaging then placed in a strong rigid outer packaging; or must be completely enclosed in inner packaging then placed with equipment in a strong rigid outer packaging.

The equipment must be secured against any movement within the outer packaging and must be equipped with an effective means of preventing accidental activation.

Maximum number of batteries /cells per package = **those necessary to power the equipment plus 2 spares sets.** (A "set" of cells or batteries is the number of individual cells or batteries that are required to power each piece of equipment)

Maximum net quantity of lithium batteries or cells per package is **5 kg** for either "**Passenger and Cargo Aircraft**" or "**Cargo Aircraft Only** "shipments.

Package test: 1.2 m drop test.

Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium metal batteries in compliance with Section II of PI969"

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Account must be approved.

ACS - Select "LB" and mention "Section II" in the restricted commodity type.

<u>Labeling /</u> <u>Marking:</u>





UN3091, Lithium Metal Batteries / Cells – PI969 Section I



Packaging:

Cells and/or batteries must be completely enclosed in inner packaging then placed in a strong rigid outer packaging; or must be completely enclosed in inner packaging then placed with equipment in a strong rigid outer packaging.

The equipment must be secured against any movement within the outer packaging and must be equipped with an effective means of preventing accidental activation.

Maximum number of batteries /cells per package = **those necessary to power the equipment plus 2 spares sets.** (A "set" of cells or batteries is the number of individual cells or batteries that are required to power each piece of equipment)

Maximum net quantity of lithium batteries or cells per package is **5 kg** for "**Passenger and Cargo Aircraft**" (PAX) and **35 kg** for "**Cargo Aircraft Only**" (CAO) shipments.

<u>As a DHL requirement</u> cells and batteries must not be packed in the same outer packaging, or placed in an overpack, with dangerous goods classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1.

Package test: Packing Group II performance standards. UN specification packaging is required.

<u>Labeling /</u> <u>Marking:</u>



When CAO used:



Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO" (only when CAO was chosen)

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)



ACS - Select"**DG**" and mention "**PAX**" or "**CAO**" as applicable, in the restricted commodity type.





UN3091, Lithium Metal Batteries / Cells – PI970 Section II



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

Maximum net quantity of of lithium batteries or cells per package (excluding the equipment) is 5 kg.

Maximum 2 packages per shipment (consignment).

<u>Labeling /</u> <u>Marking:</u>

No requirements.

Package test: No requirements.

Documentation:

No requirements

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – No requirements.

ACS – No requirements.



UN3091, Lithium Metal Batteries / Cells – PI970 Section II



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

Maximum net quantity of lithium batteries or cells per package is **5 kg** (excluding the equipment) for either "Passenger and Cargo Aircraft" or "Cargo Aircraft Only "shipments.

<u>Labeling /</u> <u>Marking:</u>



Package test: Strong rigid outer packaging equivalent to its capacity and intended use.

Documentation:

Shipper's Declaration is not required. The following statement must be mentioned on the (air)waybill:

□ "Lithium metal batteries in compliance with Section II of Pl970"

DHL Services: (**TDI** = Time Definite International , **ACS** = Air Capacity Sales)

TDI – Account must be approved.

ACS - Select "LB" and mention "Section II" in the restricted commodity type.



UN3091, Lithium Metal Batteries / Cells – PI970 Section I



Packaging:

The equipment must be packed in strong rigid outer packaging constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the cell or battery is afforded equivalent protection by the equipment in which it is contained.

The quantity of lithium metal contained in any piece of equipment must not exceed 500 g per battery and 12 g per cell.

Maximum net quantity of lithium batteries or cells per package (excluding the equipment) is **5 kg** for "**Passenger and Cargo Aircraft**" (PAX) and **35 kg** for "**Cargo Aircraft Only**" (CAO) shipments. **As a DHL requirement** cells and batteries must not be packed in the same outer packaging, or placed in an overpack, with dangerous goods classified in Class 1 (except 1.4S), Division 2.1, Class 3, Division 4.1 and Division 5.1.

Package test: Strong rigid outer packaging equivalent to its capacity and intended use.

<u>Labeling /</u> <u>Marking:</u>



When CAO used:



Documentation:

Shipper's Declaration is required. The following statement must be mentioned on the (air)waybill:

- □ "Dangerous Goods as per Attached DGD" or "Dangerous Goods as per attached Shipper's Declaration"
- ☐ "Cargo Aircraft Only" or "CAO" (only when CAO was chosen)



- TDI Account must be approved. Lithium metal batteries / cells packed according to this section are not accepted in TDI Express when transported via road to/from an ADR member state.
- ACS Select"DG" and mention "PAX" or "CAO" as applicable, in the restricted commodity type.

ADR Member States



- A Albania, Andorra, Austria, Azerbaijan;
- B Belarus, Belgium, Bosnia and Herzegovina, Bulgaria;
- C Croatia, Cyprus, Czech Republic;
- D Denmark;
- E Estonia;
- F Finland, France;
- G Germany, Greece, Georgia;
- H Hungary;
- I Iceland, Ireland, Italy;
- K Kazakhstan;
- L Latvia, Liechtenstein, Lithuania, Luxembourg;
- M Malta, Montenegro, Morocco, Republic of Moldova, Republic of Macedonia;
- N Netherlands, Nigeria, Norway;
- P Poland, Portugal;
- R Romania, Russian Federation;
- S San Marino, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland;
- T Tajikistan, Tunisia, Turkey;
- U Ukraine, United Kingdom

